

**ANC 305 - 57**

TYPE

% AL203



**Higher alumina content  
On request**

If requested, length can be shortened on site by the refractory installer with an appropriate sawing machine (clipper type) .


Main component : andalousite 57 % Al<sub>2</sub>O<sub>3</sub>  
Max temperature : 1550°C

[www.anchorsforrefractory.com](http://www.anchorsforrefractory.com)  
[contact@anchorsforrefractory.com](mailto:contact@anchorsforrefractory.com)



Tél : + 33 3 66 50 00 33 / +33 7 85 06 29 49  
PA Vallée de l'Escaut - rue de la crête - 59264 ONNAING-France

These informations are general informative indications. Many particular conditions of use and exceptions exist in industrial applications, many parameters can influence the technical choices. The informations mentioned in this technical data sheet, in particular regarding the features and the performances of the products, is provided for guidance purposes only and is liable to change depending of the conditions of use and environment. Information mentioned can be modified without notice. The company ANCHORS will in no circumstances be held liable for the consequences of any improper use. If you want some suggestions from us, applicable for your specific application and/or environment, please contact us.

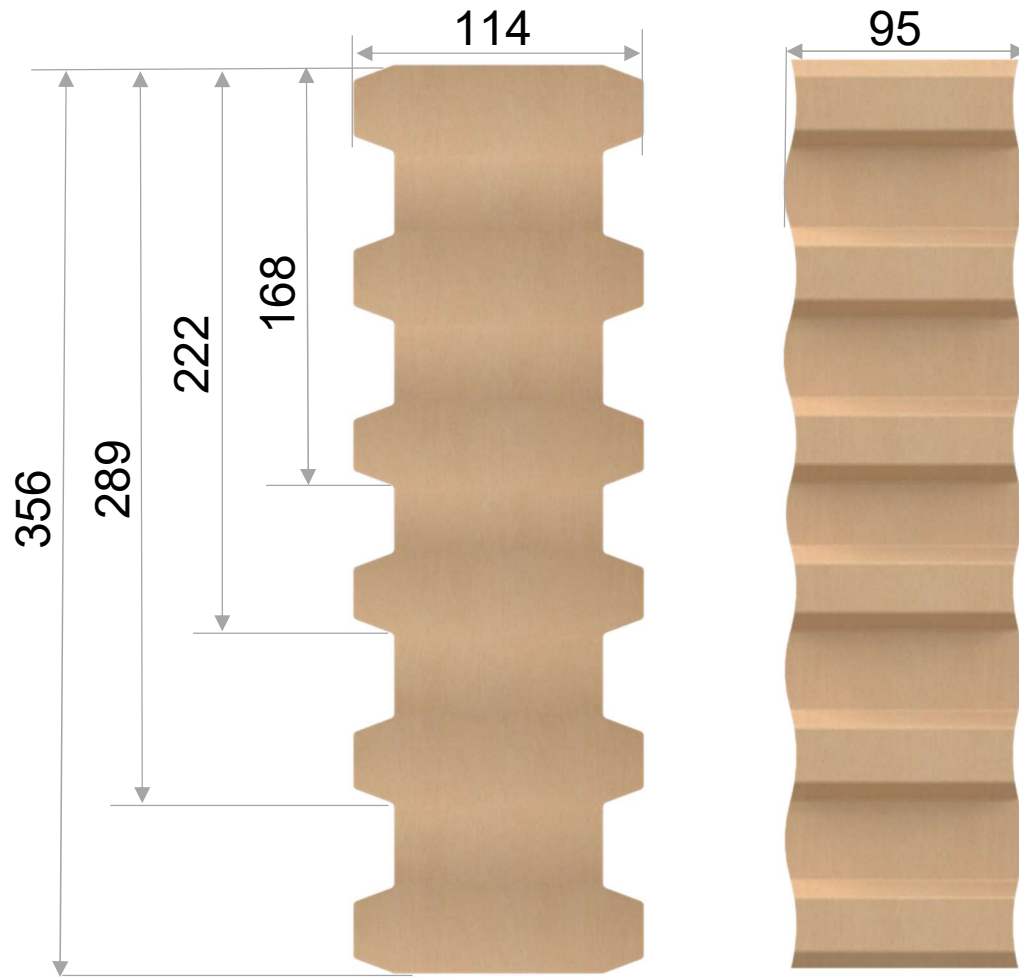

**ANC 356 - 57**  
 TYPE      % AL2O3



**Higher alumina content  
 On request**

If requested, length can be shortened on site by the refractory installer with an appropriate sawing machine ( cliper type) .


Main component : andalousite 57 % Al<sub>2</sub>O<sub>3</sub>  
 Max temperature : 1550°C

[www.anchorsforrefractory.com](http://www.anchorsforrefractory.com)  
[contact@anchorsforrefractory.com](mailto:contact@anchorsforrefractory.com)



Tél : + 33 3 66 50 00 33 / +33 7 85 06 29 49  
 PA Vallée de l'Escaut - rue de la crête - 59264 ONNAING-France

These informations are general informative indications. Many particular conditions of use and exceptions exist in industrial applications, many parameters can influence the technical choices. The informations mentioned in this technical data sheet, in particular regarding the features and the performances of the products, is provided for guidance purposes only and is liable to change depending of the conditions of use and environment. Information mentioned can be modified without notice. The company ANCHORS will in no circumstances be held liable for the consequences of any improper use. If you want some suggestions from us, applicable for your specific application and/or environment, please contact us.

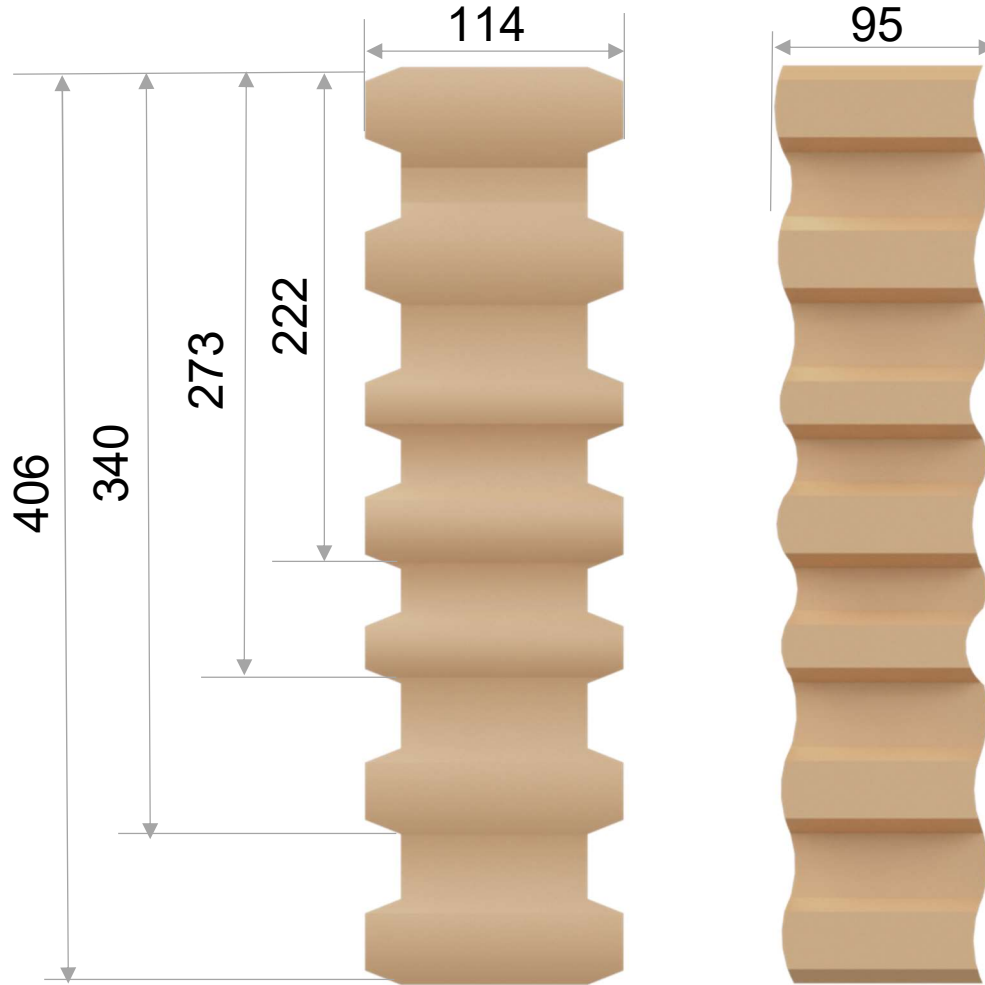

**ANC 406 - 57**  
 TYPE % AL203



Higher alumina content  
 On request

If requested, length can be shortened on site by the refractory installer with an appropriate sawing machine ( cliper type) .

Main component : andalousite 57 % Al<sub>2</sub>O<sub>3</sub>  
 Max temperature :1550°C

[www.anchorsforrefractory.com](http://www.anchorsforrefractory.com)  
[contact@anchorsforrefractory.com](mailto:contact@anchorsforrefractory.com)



Tél : + 33 3 66 50 00 33 / +33 7 85 06 29 49  
 PA Vallée de l'Escaut - rue de la crête - 59264 ONNAING-France

These informations are general informative indications. Many particular conditions of use and exceptions exist in industrial applications, many parameters can influence the technical choices. The informations mentioned in this technical data sheet, in particular regarding the features and the performances of the products, is provided for guidance purposes only and is liable to change depending of the conditions of use and environment. Information mentionned can be modified without notice. The company ANCHORS will in no circumstances be held liable for the consequences of any improper use. If you want some suggestions from us, applicable for your specific application and/or environment, please contact us.